

TO THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is a patent application under 37 CFR 1.53(b):

INVENTOR(S): Svein RENE; Christoffer WORSOE

TITLE: COLLAPSIBLE CONTAINER

X This application is being filed without the declaration of the inventor(s).

____ This is a continuing application of prior Application No. ____/

_____ Continuation
 _____ Divisional
 _____ Continuation-in-part

Enclosed are:

X Specification
X 3 Sheets of drawings
 ___ Oath or Declaration signed by the inventor(s)
 ___ Newly Executed
 ___ Copy of Oath or Declaration from a Prior Application
 ___ PLEASE DELETE the following inventor(s) named in the prior
 nonprovisional application:

_____ The inventor(s) to be deleted are set forth on a separate sheet attached hereto.

_____ If copy of Declaration filed, the entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein

☐ Microfiche Computer Program
☐ Nucleotide and/or Amino Acid Sequence Submission
☐ Assignment to
☐ Certified copy of _____
☒ X Convention priority is claimed based on Norwegian Application No.
 19992127, filed May 3, 1999, a certified copy of which will be filed
 in due course.
☐ English Translation Document
☐ Small entity declaration(s)
☒ X Preliminary Amendment
☐ Information Disclosure Statement

The Filing Fee has been calculated as shown:

___ PLEASE ENTER PRELIMINARY AMENDMENT PRIOR TO CALCULATING FILING FEE

		(Small Entity)	(Large Entity)
BASIC FEE		\$380	\$760
Total Claims	- 20 = -	x \$ 9 =	x \$ 18 =
Indep. Claims	- 3 =	x \$ 39 =	x \$ 78 =
Multiple Dependent Claims Presented	+ \$130 =	+ \$260 =	
TOTAL		\$	\$

___ Please charge Deposit Account _____ in the amount of \$ _____
(A duplicate copy of this sheet is enclosed)

___ A check in the amount of \$ _____ is enclosed to cover:


___ Filing Fee of \$ _____

___ Assignment Recordation Fee of \$ _____

___ The Commissioner is hereby authorized to charge payment of any additional filing fees required under 37 CFR 1.16 or any patent application processing fees under 37 CFR 1.17, or credit any over payment, to Deposit Account _____. A duplicate copy of this sheet is enclosed.

PLEASE CONDUCT CORRESPONDENCE WITH THE UNDERSIGNED ATTORNEY.

Date: October 13, 1999


Scott T. Wakeman
Reg. No. 37,750

DENNISON, MESEROLE, SCHEINER & SCHULTZ
1745 Jefferson Davis Highway, Suite 612
Arlington, Virginia 22202
(703) 412-1155 Ext. 17
(703) 412-1161 (fax)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Svein RENE, et. al.

Group Art Unit: (not assigned)

Serial No.: (not assigned)

Filed: (herewith)

For: COLLAPSIBLE CONTAINER

PRELIMINARY AMENDMENT

Honorable Commissioner of
Patents and Trademarks
Washington, DC 20231

Sir:

Please amend the above-captioned application as follows:

IN THE SPECIFICATION:

Page 2, line 18, delete -- and --; line 19, delete "."
and replace it with -- and, --; after line 19, add -- Fig. 7.
shows a stack of four containers according to the subject
invention in their empty condition. --.

Page 7, after "Abstract," add -- of the Disclosure --.

IN THE CLAIMS:

Claim 3, line 1, delete "anyone of the claims 1 to 2" and
replace it with -- claim 1 --.

Claim 4, line 1, delete "anyone of the claims 1 to 3" and
replace it with -- claim 1 --; line 2, delete "consists of"
and replace it with -- comprises --.

Claim 5, line 1, delete "anyone of the claims 1 to 4" and

replace it with -- claim 1 --.

Claim 7, line 1, delete "anyone of the claims 1 to 6" and replace it with -- claim 1 --.

Add the following new claims:

9. Container according to claim 2 characterised in that the bottom element (11) has attachment openings (39-44) for supporting pillars for transversal partition walls for the partitioning of the container into four sections.

10. Container according to claim 2 characterised in that each partition wall comprises two support pillars (16, 17) and a wall element (36) which can be attached to these.

11. Container according to claim 3 characterised in that each partition wall comprises two support pillars (16, 17) and a wall element (36) which can be attached to these.

12. Container according to claim 2 characterised in that the total collapsed height of the container is one quarter of its height as erected.

13. Container according to claim 3 characterised in that the total collapsed height of the container is one quarter of its height as erected.

14. Container according to claim 4 characterised in that the total collapsed height of the container is one quarter of its height as erected.

15. Container according to claim 2 characterised in that the gable walls are disengagably attached to the bottom

element in such a way that the weight can be transferred to the gable walls.

16. Container according to claim 3 characterised in that the gable walls are disengagably attached to the bottom element in such a way that the weight can be transferred to the gable walls.

17. Container according to claim 4 characterised in that the gable walls are disengagably attached to the bottom element in such a way that the weight can be transferred to the gable walls.

18. Container according to claim 5 characterised in that the gable walls are disengagably attached to the bottom element in such a way that the weight can be transferred to the gable walls.

19. Container according to claim 6 characterised in that the gable walls are disengagably attached to the bottom element in such a way that the weight can be transferred to the gable walls.

REMARKS


By the above amendment, applicant has rewritten the multiple dependent claims in single dependent form. In addition, claim 4 was amended to remove an occurrence of the phrase "consists of" and replace it with the term "comprises." The specification was also amended to add a brief description

of Figure 7 and to correct the heading for the Abstract of the Disclosure.

It is believed that these amendments place the application in better form for examination, and an action on the merits is respectfully requested.

Respectfully submitted,
Dennison, Meserole,
Scheiner & Schultz

By:


Scott T. Wakeman
Reg. No. 37,750
(703) 412-1155 Ext. 17

LAW OFFICES
DENNISON, MESEROLE, SCHEINER & SCHULTZ
612 CRYSTAL SQUARE 4
1745 JEFFERSON DAVIS HIGHWAY
ARLINGTON, VIRGINIA 22202-3417

703 412-1155

Collapsible container

The present invention relates to a collapsible container as described in the introductory part of claim 1.

5 Background

Many embodiments of collapsible type containers are known. The objective of foldable containers is to reduce the volume for storage and returned empties. At the same time, the requirements for strength and the ability to withstand impact is still high. For containers to be used for transport purposes under difficult conditions (e.g. on
 10 bumpy roads, for air freight transportation, or as loads hanging under helicopters), the strength requirements are especially high. This has led to the need for a new type of container which combines high strength and reduced space demand. Part of the required improvement can be obtained through use of higher quality materials. In addition it is necessary to find better solutions with respect to design.

15 Objective

The main objective of the present invention is to provide an improved collapsible container, which takes little space and at the same time is able to be built with high strength. It is a particular objective to provide a container which is as versatile as possible with regard to its partitioning and assembly. Furthermore the container needs to
 20 be capable of being divided into several compartments with shelves and partition walls. In addition it must be lockable to prevent access by unauthorised persons.

The invention

In a broad aspect of the invention there is provided a collapsible container as outlined in the introductory part of claim 1 wherein the side wall elements have a height which is
 25 one half of the width of the bottom element, whereas the distance between two side wall elements is less than the depth of the notches in the attachment hook elements, the corner posts of the gable walls being manufactured as tubular profiles with attachment slit openings facing inwards, for the attachment of shelves, while the supporting pillars or side posts are provided with an outwards projecting flange in both sideward
 30 directions, which flange is being furnished with slit-shaped openings for the attachment of the shelves.

This combination of elements provides a container with several advantages over known containers. It requires little space for storage and transportation when empty.

It prevents unwanted removal of the side wall elements as the different parts are mutually locked. It provides good versatility with respect to partitioning with partition walls and attachment of shelves. In a combination with use of high quality steel, it provides a container which is very stable and able to resist various types of strain, e.g. during air freight transportation and as a load carried underneath a helicopter.

Further beneficial features are defined by the dependent claims 2-8.

In the following the invention is further described by reference to a preferred embodiment where:

Fig. 1 illustrates a collapsible container according to a preferred embodiment of the invention, the various parts being shown in exploded view,

Fig. 2 shows a detailed view of a corner of the bottom element of a container according to Fig. 1,

Fig. 3 shows a perspective view of corner pillar for a container according to the invention,

Fig. 4 shows a crosssectional view of a sidewall element with hook-shaped elements,

Fig. 5 shows a crosssectional view of a supporting pillar for a partition wall, and

Fig. 6 shows a shelf plate for a container according to the invention in perspective view.

Fig. 1 shows a collapsible container according to the invention, with a bottom element 11, two gable walls 12 and 13 and two side walls 14 and 15 which each consists of three elements 14 A-C and 15 A-C. The side wall 15 and its elements 15 A-C are not shown in Fig. 1. At the middle of each side edge of the bottom element 11 is mounted a supporting pillar 16 and 17 for a partition wall 36 and for shelves to be further described below.

The bottom element 11 is designed with longitudinal girders 18, traversal girders 19 at the ends and supporting paws 20 which provide an aperture for a forktruck. The dimensions of the bottom element may be, for example, 210 x 100 cm, however, other dimensions may be used according to a convenient regulation. In practice such containers are dimensioned to fit conveniently with other transportation equipment, e.g. within larger freight containers, lorries and planes.

At each corner is arranged an extending support furnishing 21 in the shape of an angular guide (fig. 2) which provides room and support for the lower part 23 of a supporting pillar 22. Fig. 3 shows a free supporting pillar 22. The supporting pillars 22 are integrated with the gable wall, and are manufactured with a substantially tubeshaped rectangular crosssection, with a longitudinally arranged split-shaped recess 24. At the midpoint of the supporting pillars 22 is arranged slit openings 52 for attachment of the sidewall elements. The gable walls 12 and 13, like the other wall elements, are covered by a netting to prevent unwanted removal of goods stored within the container.

The sidewall elements 14 A-C and 15 A-C are manufactured as modules with rectangular frame tubes 26 and wire grids 27. At each end, adjacent to the corners, are arranged two extending hooks 28, 29 of a plastic material (fig. 4) with a notch 30 for engagement with slit openings 31 in the supporting pillars 16, 17, 22. The notches 30 are arranged closer to the free end of the hooks 28, 29 than to the ends attached to the frame tubing 26, so that they may be disengaged from the slit openings by sideways displacement. The depth of the notches 30 must be larger than the distance B between two side elements adjacent to each other. This will prevent a side element from being removed without first removing the element above.

The supporting pillars 16, 17 have slit openings for attachment of shelves 33 as shown in Fig. 5. The shelves 33 have flanges 34 projecting on opposite sides, which at its ends are extended to hook-shaped elements 35 for attachment. Regarding the positioning of the notches, the same applies here as described above.

The container according to Fig. 1 has a partition wall 36 and a shelf 37, 38 mounted on each side of the partition wall. The partition wall 36 is attached between the supporting pillars 16, 17, which are disengagably attached to the bottom element. In addition to the attachment openings 39, 40 at the centre, there are two further pairs of attachment openings, 41, 42 and 43, 44, arranged centrally on each half of the bottom element. It is thus possible to position up to three partition walls or one or two partition walls into three different positions. At a midpoint of the short ends of the bottom element 11, attachment furnishings 45 are arranged for similar supporting pillars (fig. 2). Such a furnishing may also be arranged (not shown) centrally on the bottom element. In Fig. 2 the bottom element is shown without a wire grid bottom.

Fig. 5 shows a supporting pillar 16 for a partition wall. It has a central U-shaped profile with a flange 46 on each side. Along the bottom of the U-profile slit openings 47 are arranged for attachment of the partition wall 36, while along both flanges, a series of slit openings 48 for shelves 37, 38 are arranged in arbitrary positions determined by the
 5 dividing of the series of slit openings.

The side wall elements are designed with a width, i.e. a height extent in a mounted condition, which is one half of the width of the bottom element. This means that the space is optimally utilized when returning and storing empty containers. Fig. 7 shows how four containers according to the invention may be stacked in their empty condition.
 10 This gives an optimal utilization of the space available, and allows four empty containers to be transported with the same transporting means and within the same space demand as one single erected container.

Another advantage with this container design is that all elements can be lifted and positioned into place or disengaged by one person alone. This means greater versatility
 15 during handling, since two people are not required. This again means that the time for assembly and the personnel costs involved with the use of the container according to that of the invention, is significantly reduced compared to that of previously known containers.

It is advantageous that the corner posts are disengagably attached to the bottom
 20 element, for example with disengagable bolts 51 which can withstand the weight of the container. In this way, the container can be lifted with equipment that is arranged to engage with hooks or the like in the upper region of the gable walls. In addition there may be formed a slit opening 50 (fig. 2) in a flange 49 of the upwards extending support furnishing 21, for receiving a protruding hook-shaped part of a side element. This gives
 25 an automatic locking between the bottom element and side element which allows lifting of the assembled container.

The container according to the invention is assembled in a way that locks the different parts together mutually. With an appropriate lock that blocks lifting of the uppermost
 30 sidewall elements, the entire structure will be locked against opening.

Claims

1. Collapsible container comprising a bottom element (11) with openings (21) at the corners for disengagable attachment of two opposite gable walls (12, 13), wherein the
 5 gable walls are connected to or are associated with supporting pillars (24) which are provided with slit-shaped openings (31) for disengagable mounting of longitudinally arranged sidewall elements (14, 15) which have projecting hooks (28, 29) with notches (30) for engagement with the slit-shaped openings, and wherein openings (39-44) are arranged in the bottom element (11) for disengagable attachment of a transversal
 10 partition wall (36),

characterised in that

- the sidewall elements (14, 15) each have a height dimension (A) which is substantially one half of the width of the bottom element (11),
- the distance (B) between two sidewall elements (14, 15) is less than the depth
 15 of the notch (30) in the hooks (28, 29),
- the corner posts (22) of the gable walls (12, 13) are manufactured with a tubular profile with attachment slitshaped openings (31) facing inwards, for attachment of shelves (33), and
- the container includes supporting pillars or side posts (16, 17) with a
 20 projecting flange in both sideward directions, said flanges being provided with slit-shaped openings (42) for attachment of shelves (33).

2. Container according to claim 1,

characterised in that the supporting pillars (24, 39, 40) have attachment slit openings at
 25 an upper end for arrangement of shelves (33) constituting covering elements (lids).

3. Container according to anyone of the claims 1 to 2,

characterised in that the bottom element (11) has attachment openings (39-44) for supporting pillars for transversal partition walls for the partitioning of the container into
 30 four sections.

4. Container according to anyone of the claims 1 to 3,
characterised in that each partition wall consists of two support pillars (16, 17) and a wall element (36) which can be attached to these.
- 5 5. Container according to anyone of the claims 1 to 4,
characterised in that the total collapsed height of the container is one quarter of its height as erected.
6. Container according to claim 5,
- 10 **characterised** in that a support furnishing (21) at each corner of the bottom element (11) provides support for an empty container to be stacked.
7. Container according to anyone of the claims 1 to 6,
characterised in that the gable walls are disengagably attached to the bottom element in
- 15 such a way that the weight can be transferred to the gable walls.
8. Container according to claim 7,
characterised in that the sidewall elements engage with elements (23) which project up from the bottom element, so that the corner posts (24) become locked to the bottom
- 20 element.

Abstract

Collapsible container comprising a bottom element (11) with openings (21) at the corners for disengagable attachment of two opposite gable walls (12, 13). The gable walls are connected to or are associated with supporting pillars (24) which are provided with slit shaped openings (31) for disengagable mounting of longitudinally arranged sidewall elements (14, 15) which have projecting hooks (28, 29) with notches (30) for engagement with the slit-shaped openings. Openings (39-44) are arranged in the bottom element (11) for disengagable attachment of a transversal partition wall (36).

The sidewall elements (14, 15) each have a height dimension (A) which is one half of the width of the bottom element (11). The distance (B) between two sidewall elements (14, 15) is less than the depth of the notch (30) in the hooks (28, 29). The corner posts (22) of the gable walls (12, 13) are manufactured with a tubular profile with attachment slit openings (31) facing inwards, for attachment of shelves (33). The collapsible container also includes supporting pillars or side posts (16, 17) with a projecting flange in both sideward directions, these flanges being provided with slit-shaped openings (42) for attachment of shelves (33).

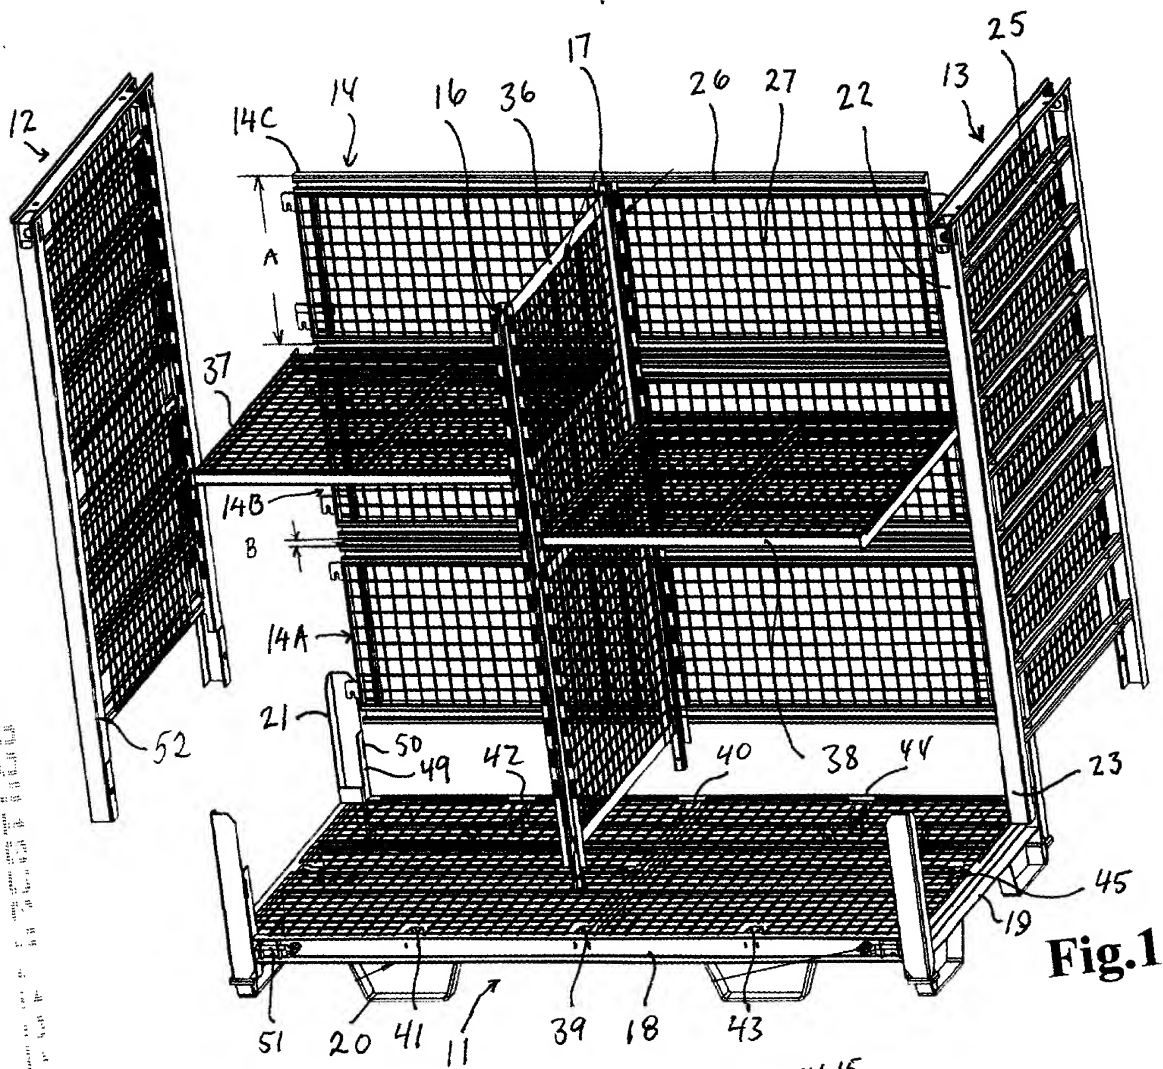


Fig. 1

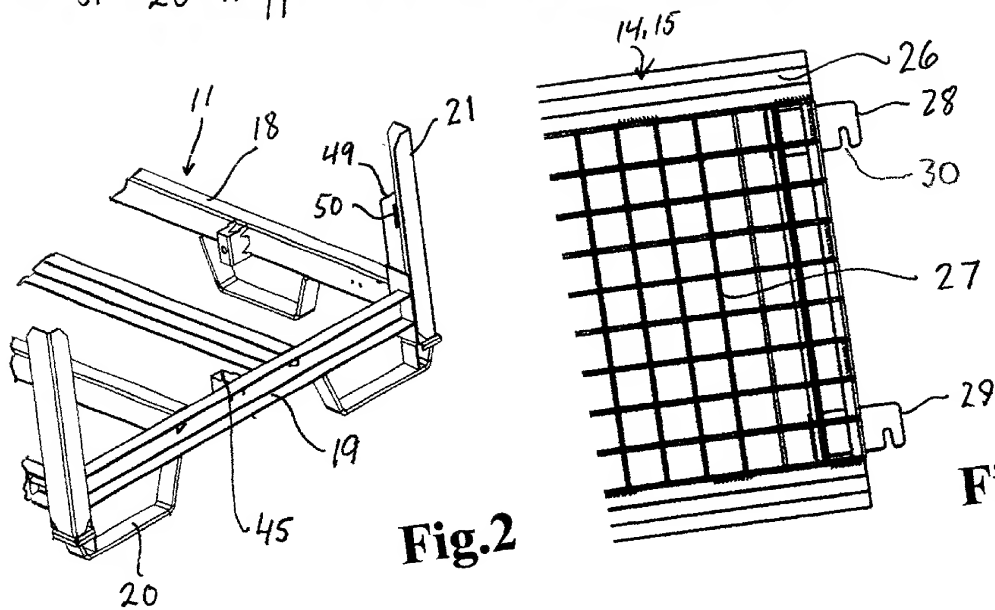


Fig. 2

Fig. 4

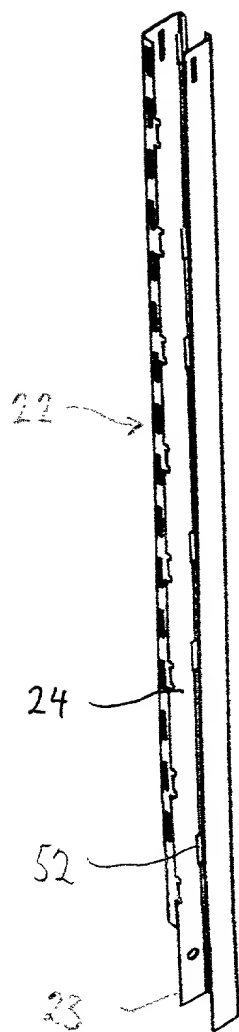


Fig.3

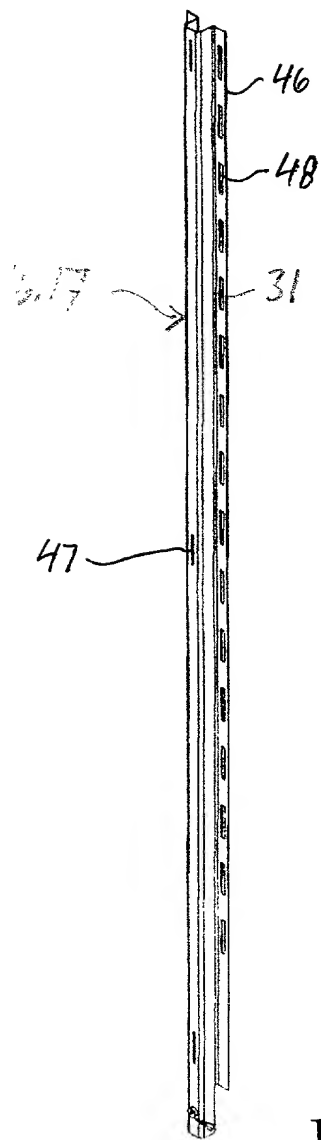


Fig.5

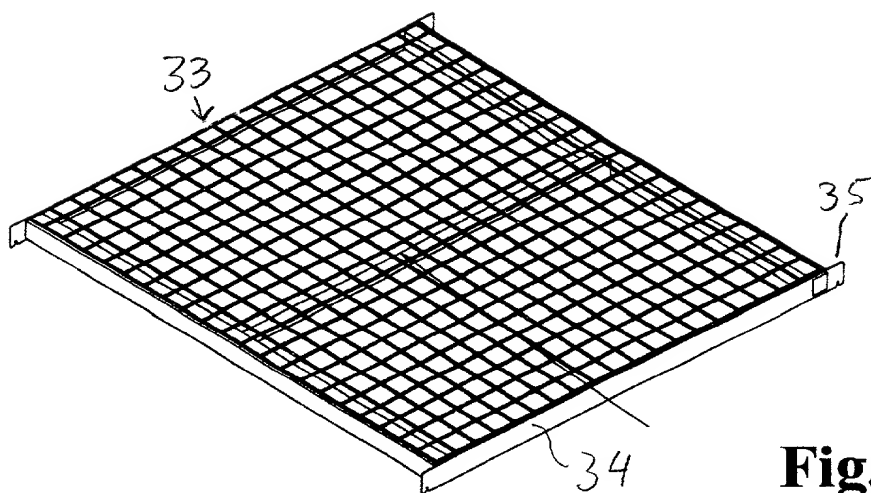


Fig.6

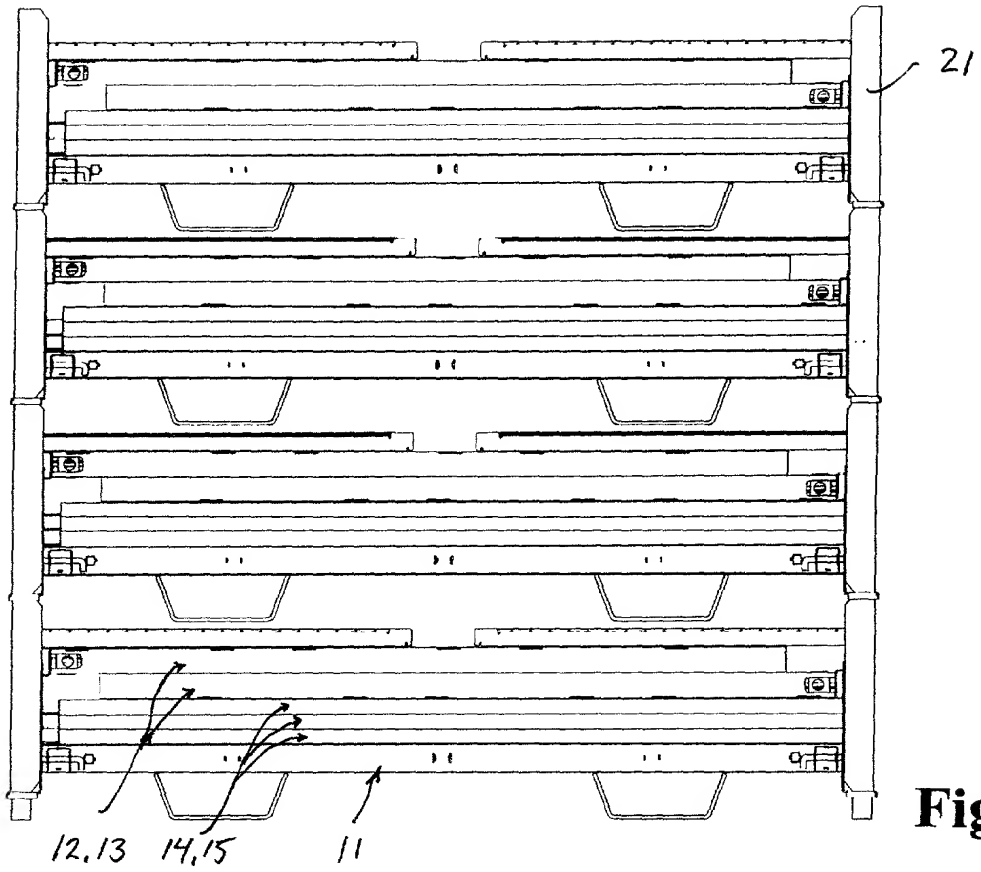


Fig.7